

Fitted Niq adjustable Proyector Niq empotrado orientable



Small projector with a stainless steel wall conduit.
Spotlight adjustable by up to 8°.

Proyector de pequeñas dimensiones con pasamuros de acero inoxidable. Punto de luz orientable 8°.

Consumption/ Consumo

Monocolour/ Monocolor: 6 W (9VA)
Multicolour / Multicolor: 4W (7VA)
DMX / DMX: 4W (4VA)

Voltage/ Voltaje

Monocolour/ Monocolor: 12 Vac
Multicolour / Multicolor: 12 Vac
DMX/ DMX: 24 Vdc

Lumens/ Lúmenes

Monocolour/ Monocolor: 315 lm
Multicolour / Multicolor: 186 lm
DMX/ DMX: 186 lm

Efficiency/ Eficiencia

Monocolour/ Monocolor: 78,7 lm/W
Multicolour/ Multicolor: 46,5/W
DMX/ DMX: 46,5/W

Life Span/ Vida útil


L80 - 50.000h

Protection level/ Grado de Protección

IP68



I 1246 Fitted Niq adjustable projector
Proyector Niq empotrado orientable

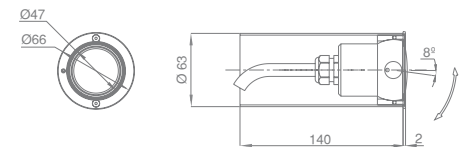

Code/ Código	Light/ Luz	Face Plate/ Embellecedor	Optic/ Óptica	Option/ Opción	Control/ Control
I 1246	NW Neutral white Blanco neutro W Cool white Blanco frío WW Warm white Blanco cálido M Multicolour Multicolor R Red Rojo G Green Verde B Blue Azul	Material/ Material P Plastic Plástico I Stainless Steel Acero Inox. Shape/ Forma S Square Cuadrado R Round Redondo	N Narrow Concentrada M Medium Media W Wide Abierta	DMX	I0828 Remote control Control Remoto I0826 Modulator Modulador I0826DMX DMX Modulator Modulador DMX I0829 Power supply Alimentador I0832DMX DMX power supply Alimentador DMX I0831 Push-button Pulsador